

FCom Tuning Fork Crystal

Series FSX-215

SMD 32.768 kHz Crystal 2.0×1.2 mm



Feature

- Ultra small size 2.0×1.2×0.6 mm
- High reliability environmental performance
- High frequency stability and high precision
- RoHS and REACH Compliant , Pb-free

Application


- Consumer products
- Small mobile devices
- Industrial electronic equipment
- Communication devices

ELECTRICAL SPECIFICATIONS



Parameters	Symbol	Min.	Typ.	Max.	Units	Notes
Nominal Frequency	F	32.768			kHz	Test condition Ambient temperature: 25 ± 5°C Relative humidity: 40% ~ 70%
Frequency Tolerance (at 25°C)	FT	± 5, ± 10, ± 20			ppm	
		± 10, ± 20, ± 30			ppm	
		± 10, ± 20, ± 30			ppm	
Operating Temperature	Topr	-40	25	125	°C	
Load Capacitance	CL	6, 7, 9, 12.5 or specify			pF	
Drive Level	DL	-	0.1	0.5	uW	
Equivalent Series Resistance	ESR	-	-	70	Kohm	
Shunt Capacitance	C0	1.5			pF	
Temperature Coefficient	-	-0.036±0.005			ppm/T ²	
Insulation Resistance	-	500	-	-	Mohm	DC100V±15V
Aging	-	± 3			ppm	1st Year

Note : The table shows common spec. if you have special spec. requirement , please feel free to contact our salesperson.

DIMENSION(mm)

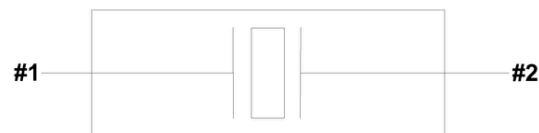

Connection

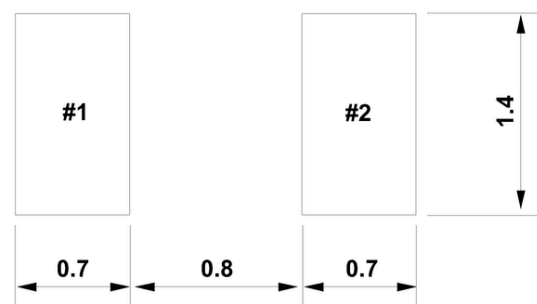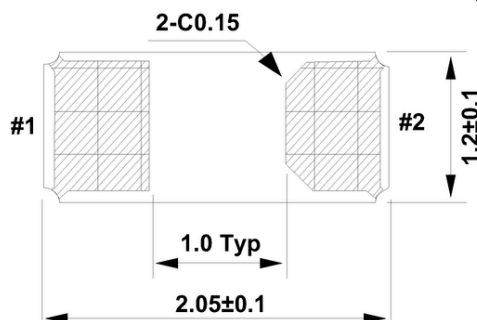

Suggested Layout