FCom DIFFERENTIAL CRYSTAL OSCILLATOR


Series FCO-2L-UJ

6-SMD, No Lead 2.5 x 2.0 mm


Package Dimensions, Solder Pads and Pin Functions

Body: 2.50 ± 0.10 x 2.00 ± 0.10 mm. Height: 0.92 ± 0.10 mm.

TOP VIEW

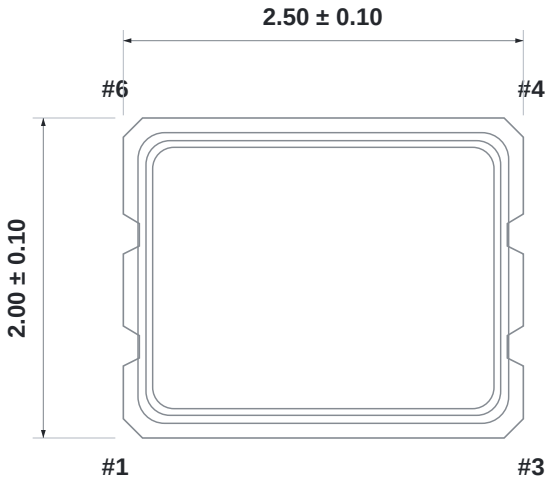


BOTTOM VIEW

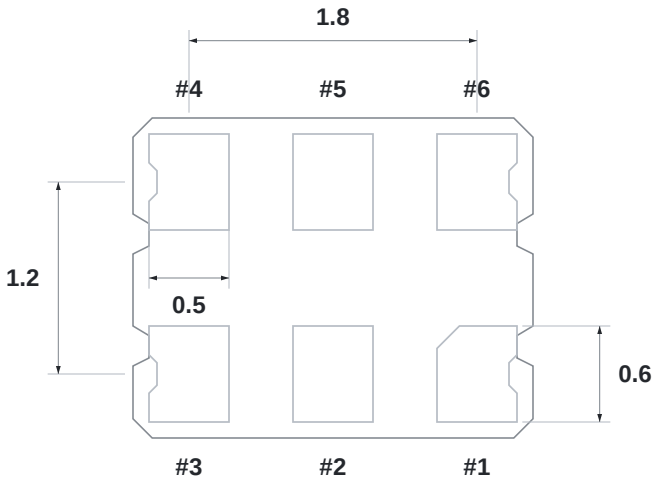

SIDE VIEW



SOLDER PAD LAYOUT

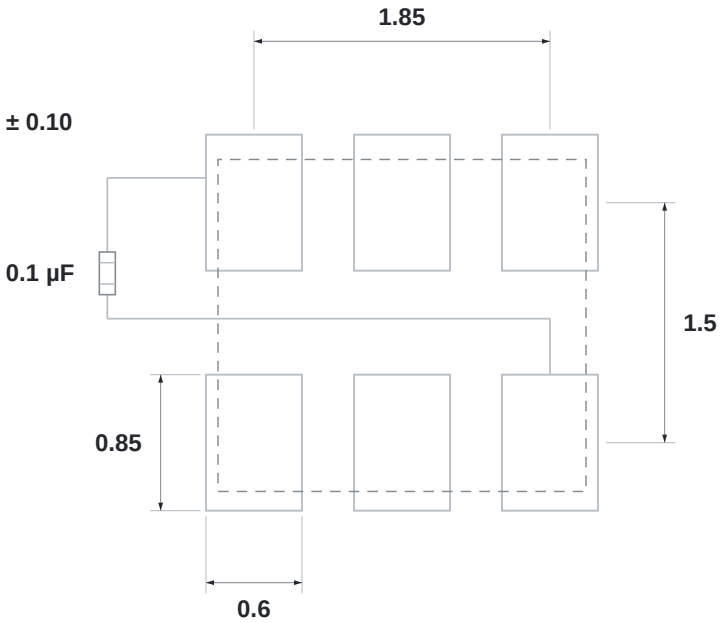

Place a 0.1 µF bypass capacitor as close as possible to the part between VDD and GND pads.

Pin Functions (as supplied)

Pin No.	Function
1	NC/Tri-State
2	Tri-State/NC
3	GND
4	Output
5	No Connection
6	Supply Voltage

All dimensions are in millimeters.

Pin functions are reproduced from the supplied drawing; pin 5 is No Connection.

For the selected NC/Tri-State configuration, please contact FCom.