FCom DIFFERENTIAL CRYSTAL OSCILLATOR

Series FCO-3L-UJ


6-SMD, No Lead 3.2 x 2.5 mm


Package Dimensions and Solder Pad Layout


3225 six-pad SMD package


Body: 3.20 ±0.15 x 2.50 ±0.15 mm

Height: 0.90 ±0.15 mm

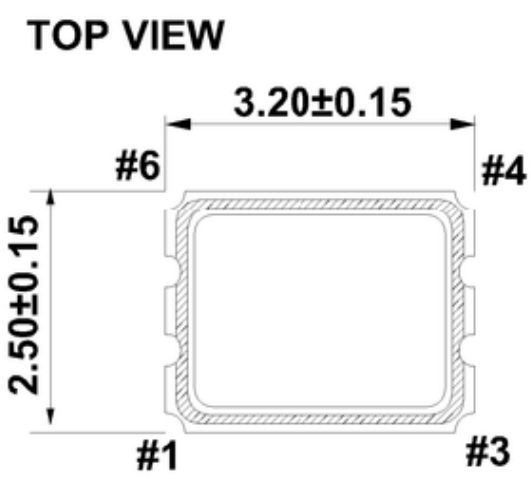

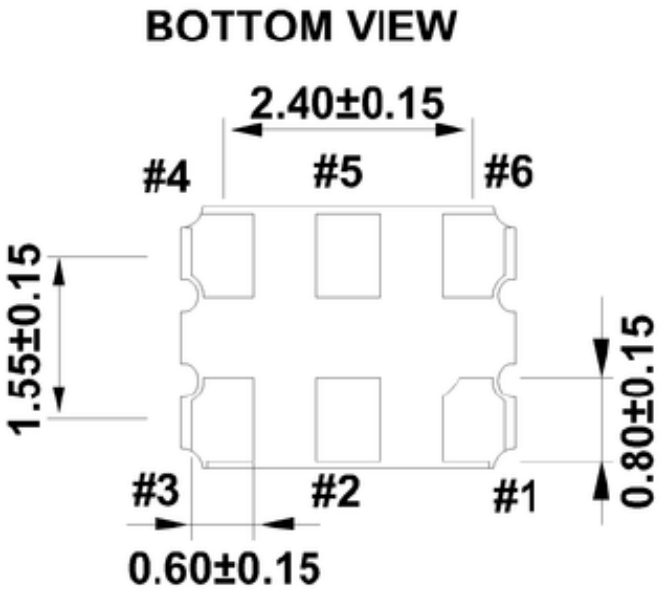

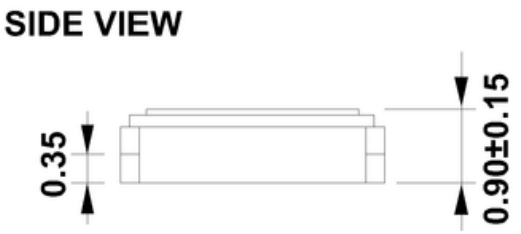

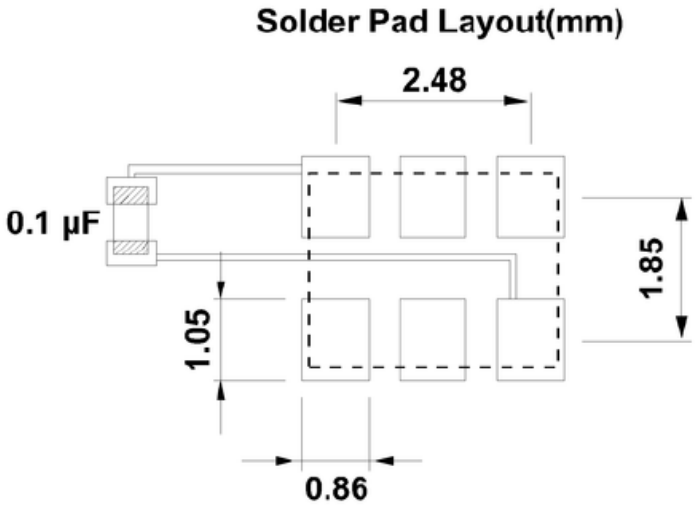

PIN#	Function
1	NC/Tri-State
2	Tri-State/NC
3	GND
4	Output
5	No Connection
6	Supply Voltage

To ensure optimal oscillator performance, place a by-pass capacitor of 0.1µF as close to the part as possible between Vdd and GND pads.

All dimensions are in millimeters.

For configuration details, please contact FCom.