FCom DIFFERENTIAL CRYSTAL OSCILLATOR

Series FCO-6L-UJ


6-SMD, No Lead 2.0 x 1.6 mm


Package Dimensions and Solder Pad Layout


2016 six-pad SMD package


Body: 2.05 ±0.10 x 1.65 ±0.10 mm

Height: 0.70 ±0.10 mm

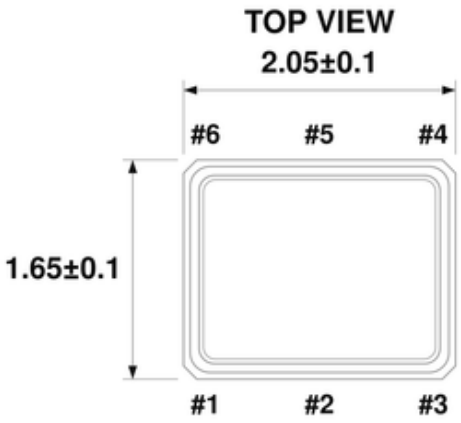

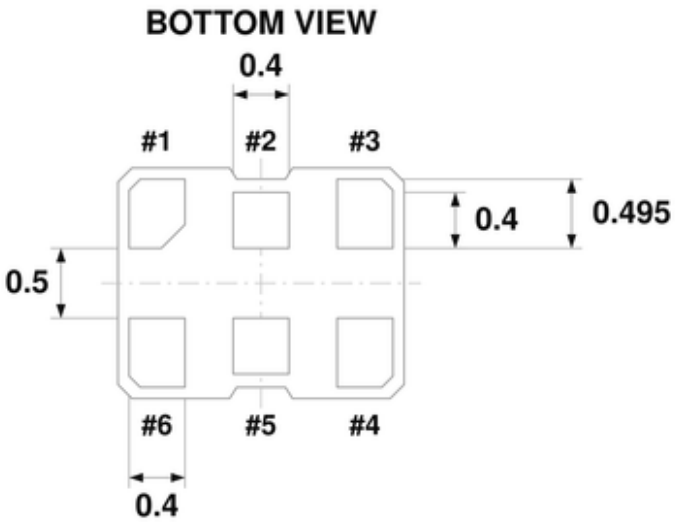

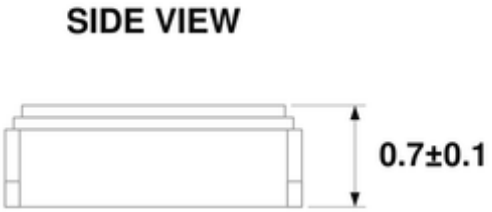

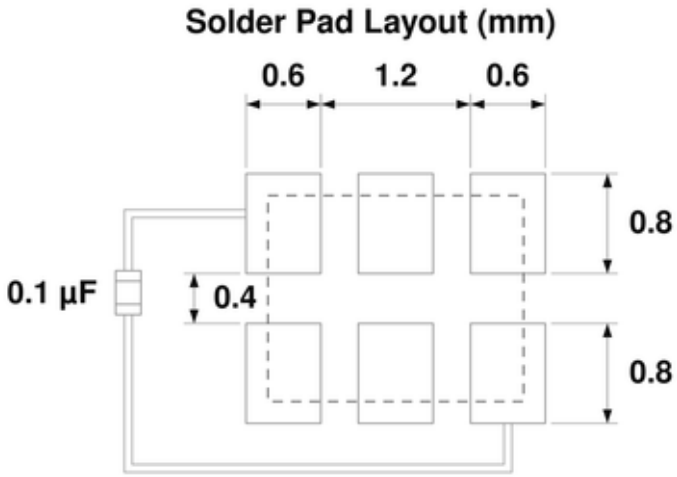

All dimensions are in millimeters.

Nominal package class: 2016.

For configuration details,
please contact FCom.

Place a 0.1 µF bypass capacitor as close as possible to the device between VDD and GND.