FCom DIFFERENTIAL CRYSTAL OSCILLATOR


Series FCO-6LH

High-Frequency Low-Jitter | 6-SMD, No Lead | 2016


Package Dimensions and Solder Pad Layout

2016 package (nominal 2.0 x 1.6 mm). All dimensions are in millimeters.

TOP VIEW

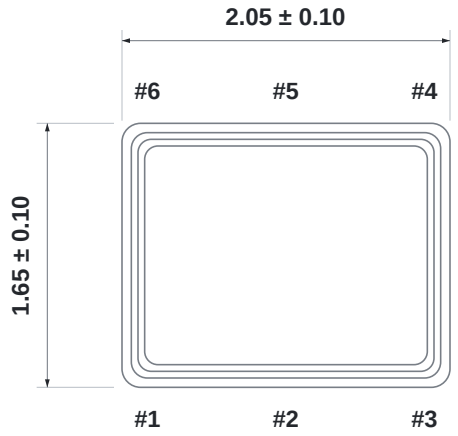


BOTTOM VIEW

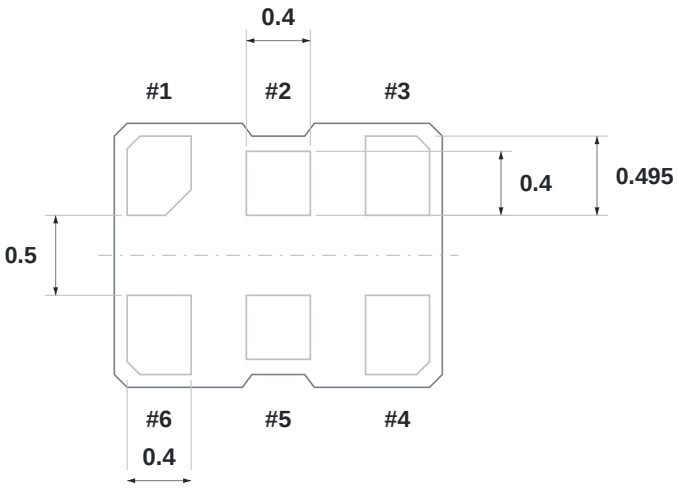

SIDE VIEW



SOLDER PAD LAYOUT

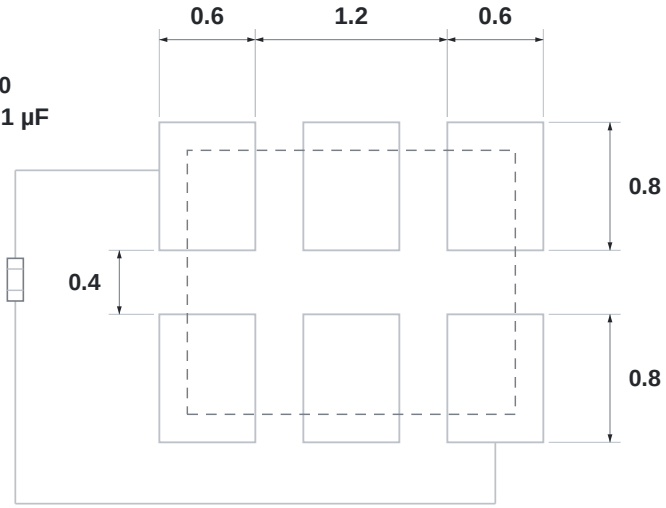

Place a 0.1 µF bypass capacitor as close as possible to the device between VDD and GND.

Package Dimensions

Dimension	mm
Body length	2.05 ± 0.10
Body width	1.65 ± 0.10
Height	0.70 ± 0.10
Terminal width	0.40
Outer terminal height	0.495
Vertical terminal gap	0.50

All dimensions are in millimeters.

Pin numbers refer to top and bottom views.